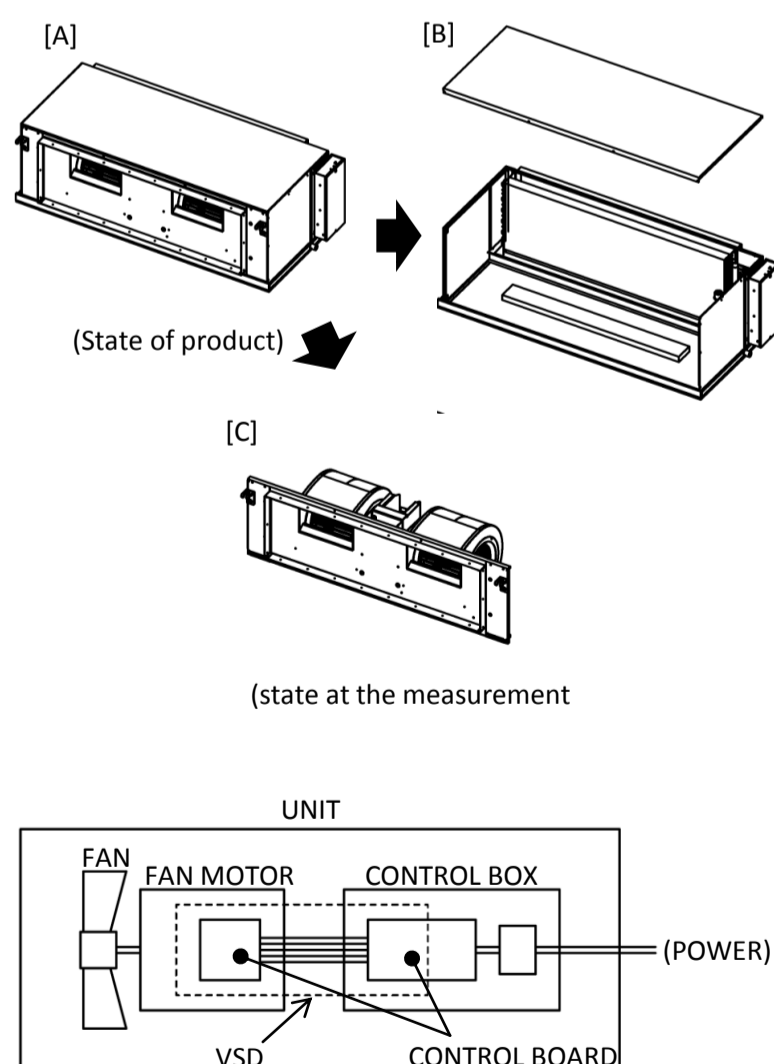


# Information sheet (Lot.11)

This is the information for FAN in regards to ErP pursuant to the Commission Regulation(EU) No327/2011

No.	Items	Values
1	Overall Efficiency	50.5
2	Measurement Category	B
3	Efficiency Category	Total
4	Efficiency Grade	42
5	VSD	Applicable
6	Year of Manufacturer	Refer to LABEL(RATING)
7	Manufacturer's Name	FUJITSU GENERAL LIMITED
	Place of Manufacturer	1116, Suenaga, Takatsu-ku, Kawasaki, Japan
8	Fan Model Number	9320142148
9	Rated Motor Power Input at Optimum Energy Efficiency	0.149 kW
	Flow Rate at Optimum Energy Efficiency	1267 m <sup>3</sup> /h
	Pressure at Optimum Energy Efficiency	186.7 Pa
10	Rotations at Optimum Energy Efficiency	1090 rpm
11	The specific ratio	1.0
12	Information relevant for facilitating disassembly, recycling or disposal at end-of-life	<p>[Material Information]</p> <p>Fan : PP-GF , Aluminum            Casing : PP            Motor : Composite</p> <ul style="list-style-type: none"> <li>• Frame : Unsaturate polyester resin , Steel</li> <li>• Wire : Copper</li> <li>• Connector : Resin(6 nylon)</li> <li>• Protective tube : PVC</li> </ul>
13	Information relevant to minimize impact on the environment and ensure optimal life expectancy as regards installation, use and maintenance of the fan	This fan is produced in a state incorporated in product. Refer to installation and maintenance information of product.
14	Description of additional items used when determining the fan energy efficiency, such as ducts, that are not described in the measurement category and not supplied with the fan	<p>At the time of measurement, remove parts[B] from product[A].            ※Diameter of the outlet: 0.144×0.270 (×2 pieces)</p>  <p>UNIT</p> <p>FAN FAN MOTOR CONTROL BOX (POWER)</p> <p>VSD CONTROL BOARD</p> <p>Refer to wiring diagram on the unit about the wiring.</p>